


From Your Friends at EternaTree[®]

EternaMotion

(batteries not required)

Inventory

- Base Plate (A)
- Catching Post (B)
- Swinging Arm (C)
- Platform Support (D)
- Counterweight (E)
- Platform Assembly (F)
(platform, rubber bands,
bead, washer, brass ring)
- Metal Hook (G)
- Winding Key (H)
- Small Tube (I)
- Swinging Ball Assembly (J)
(ball, washer, bead, elastic thread)
- Base Plate Hole (K)
- Base Plate Hole (L)
- Base Plate Hole (M)

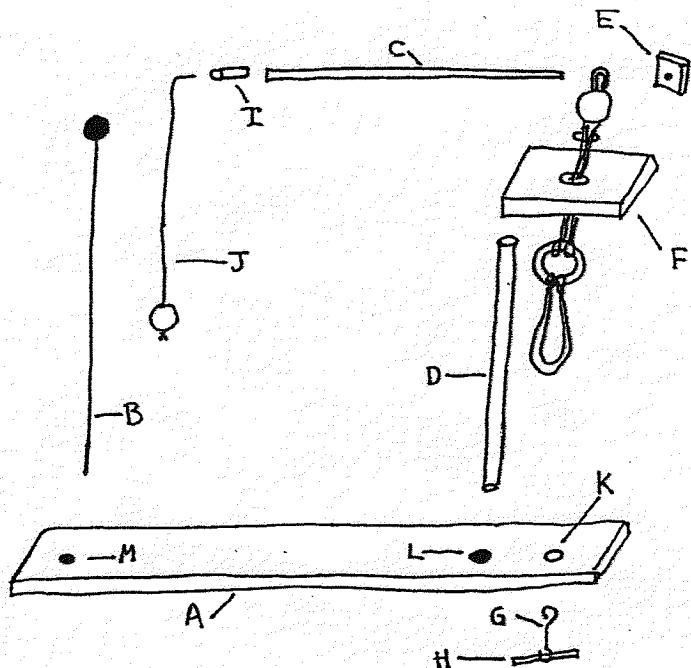

Put It Together Instructions

1. Insert one end of Platform Support (D) into hole in Platform Assembly (F). Insert other end into Hole (L) of Base Plate (A). Align Platform Assembly such that rubber bands hang above Hole (K) in Base Plate.
2. Insert Swinging Arm (C) about 2 inches through rubber bands above the bead of the Platform Assembly (F). Pull rubber bands to tighten Swinging Arm against bead, and bead and washer against platform. Install Counter Weight (E) on short end of Swinging Arm.
3. Insert smaller loop of Metal Hook (G) into Hole (K) of Base Plate (A). In the countersunk space in the bottom of the Base Plate, insert Winding Key (H) through the loop of Metal Hook. Catch the lower rubber bands in the upper loop of the Metal Hook.
4. Insert Catching Post (B) in Hole (M) of Base Plate (A) and adjust Swinging Arm (C) so that its end is about one inch from Catching Post.
5. Pass the end of the elastic thread of the Swinging Ball Assembly (J) through the Small Tube (I), adjusting length of thread so that the bead hangs about three inches from the Base Plate (A) when Swinging Arm (C) is parallel to Base Plate. Slip Small Tube onto end of Swinging Arm to secure.

Operating Instructions

Lay EternaMotion on its side with the bottom of the Base Plate (A) facing you. Turn Winding Key (H) approximately 20 full turns. Hold the Counterweight (E) and place EternaMotion upright on a flat surface. Release the Counterweight and stand back!

As needed, adjust position of Swinging Arm, length of elastic thread, and number of winds for best operation.

As always, if you have any difficulties assembling or operating our product, don't hesitate to call our 800 number.